




# CUPA 5

---


*Non-carbonated slate formed by tectonic compression.  
Dark grey slate with a riven surface.*






 Quarry Valdacal. Puzmazán (Ourense) Spain.

 Operating since 1971.

 Sizes: 20x20 - 60x45 cm  
Thickness: 5 - 6.5 - 7.5 - 9 mm

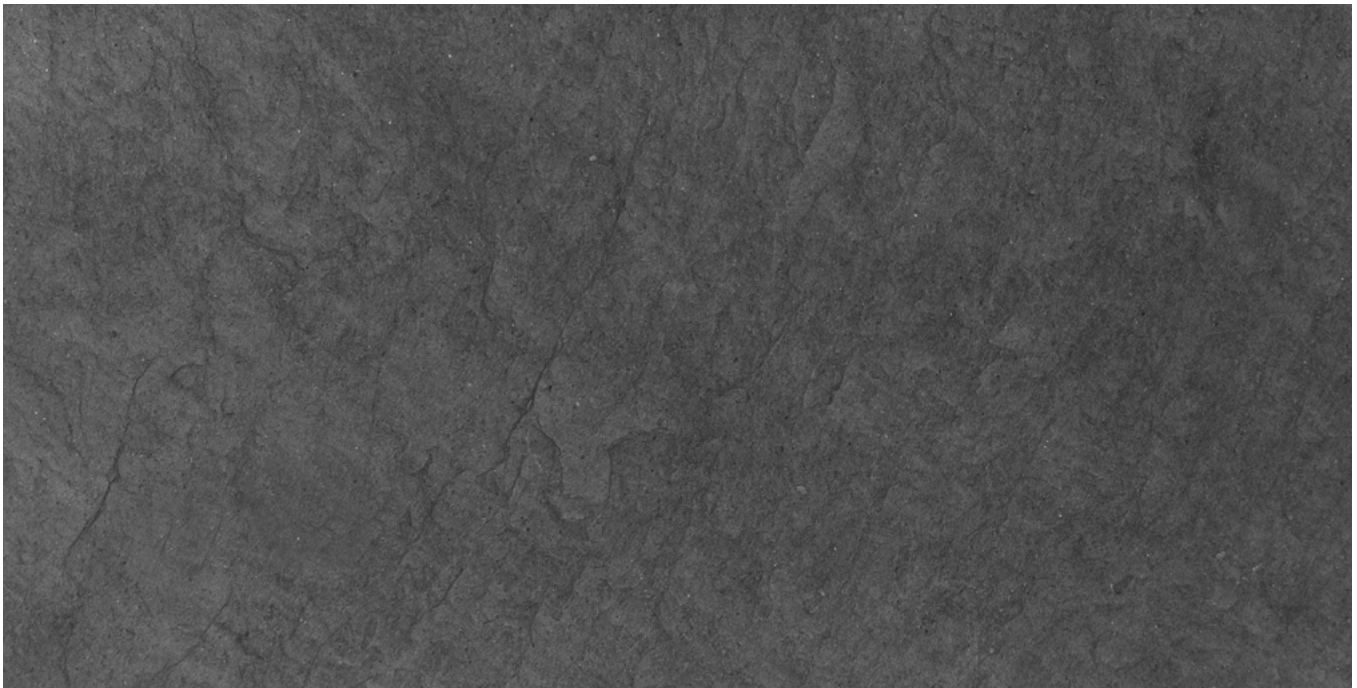

## Formats



## Selections



## Technical specifications

ABSORPTION	CARBONATE NON CARBONATED	MOR CHARACTERISTIC	SO <sub>2</sub> EXPOSURE TEST	THERMAL CYCLE TEST	FREEZE THAW TEST
0,21% Code : W1 (< 0,4%)	0,30% Complies (< 1,5%)	Longitudinal 43,5 MPA Transverse 45,7 MPA	S1	T1	Fullfil < 0,6%

## International certifications



European Standard: EN 12326 | French Specifications: NF 02/03 N° 5275 | Belgian Specifications: ATG H848